LK 527 2W Actuator

- Click system for actuator



Technical Data

Ambient temperature:	Min. 1 °C/Max. 55 °C
Protection type:	IP 44
Electrical connection:	Fixed wire
Signal connector:	2-Point SPST
Cable specification:	3 x 0.75 mm²
Wire colors:	Blue, brown, black
External insulation:	PVC
Actuator:	230 VAC, 50 Hz
Type approval certificate:	CE


Actuator for controlling LK 527 zone valves.
The zone valve has On/Off control and is controlled by 2-point signal.

Assembly/disassembly of actuator on the ball valve is simple and secure, using the clip-system. The zone valve must not be installed with the actuator underneath the valve unit.

In case of a power failure, the valve stays in its current position. When the power is switched off, the valve can be manually set by the handle on the actuator.

Please note that the actuator can be installed in only one position.

LK 527 2W - Actuator

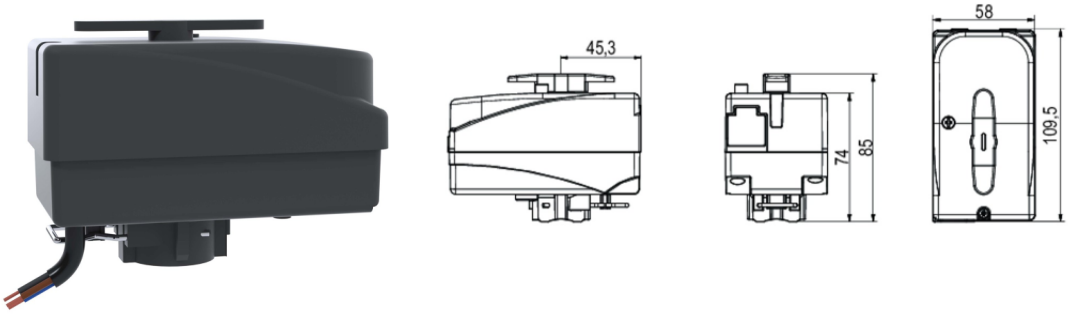

Article	Connection	Voltage	Torque	Operation time	Weight (kg)
066282	2-point SPST output, with cable 1 m	230 V	5 Nm	12 s	0.4
066283	2-point SPST output, with cable 1 m	230 V	5 Nm	30 s	0.4